

GREASE SEPARATORS APOLLO RANGE

SILT STORAGE V100 - SIZE 1 TO 7

IN-GROUND INSTALLATION WITH TABLECLOTH OR ABOVE GROUND

MAXIMUM BACKFILL HEIGHT OF 800 MM

POLYETHYLENE (PE)

6630

1 Technical definition


A grease separator is a device designed to separate and store solid matter, fats and oils of animal and vegetable origin contained in household water. A V100 silt storage zone is integrated in each device. Our devices are in accordance with the NF EN 1825-1 standard and are CE marked. The grease retention capacity is 40 liters per l/s.

2 Use

Concerning small communities and professional installations, collective kitchens, restaurants the obligation to install grease separators is based on the standard departmental sanitary regulations and the public health code. **For the food-processing industries** for food industries, it is essential to transmit the CCTP of a technical research department to establish the dimensioning of an adapted device.



GARANTIE
CONTRE LA
CORROSION
JUSQU'À
20 ANS

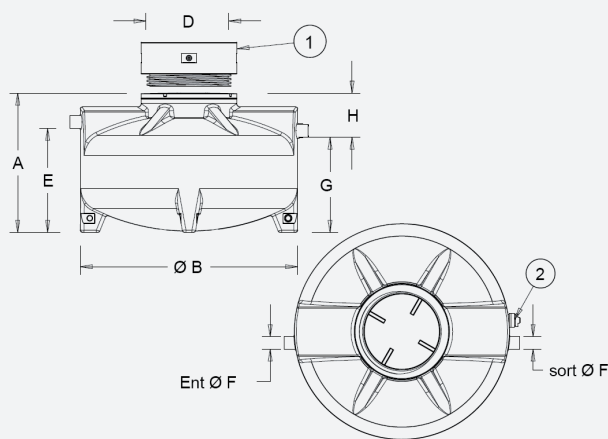

3 Maintenance

The cleaning company must empty the unit regularly, from 15 days to 2 months, depending on the amount of solids and grease collected.



IMPORTANT after each complete draining, wash the unit and fill it immediately with clean water.

4 Installation

Under ground :

The device will be buried and is designed to be installed in the presence of ground water or in hydromorphic soil whose level does not exceed the upper generatrix of the device. If vehicles pass over the device or if the height of the embankment exceeds 800 mm, a reinforced concrete slab must be poured on the undisturbed ground so that the separator is not directly subjected to the loads.

Above ground installation:

The separator shall be installed level on a perfectly flat and smooth surface over the entire footprint of the unit. The cover shall always remain accessible for maintenance. **In case of above ground installation, the room must be equipped with a water collection and evacuation system to avoid any flooding in case of overflow.** Please refer to our website to consult the documents in force.

5 Remote extraction

Remote extraction in DN80 is possible by ordering the option OD4-BBTN... 1 to 7 (depending on the size). The installer must supply and install a PVC pressure pipe to be connected to the unit outlet and must place the fireman's coupling supplied with the option at the curb.

Reference	Size	A	Ø B	Ø D	E	Ø F	G	H	Volume of sludge trap (l)	Volume Separator (l)	Extraction device option
SG2/6630/01	1	765	1244	600	485	100	415	350	103	262	OD4-BBTN1
SG2/6630/02	2	1059	1244	600	779	100	709	350	205	509	OD4-BBTN2
SG2/6630/03	3	1356	1244	600	1076	100	1006	350	306	756	OD4-BBTN3
SG2/6630/04	4	1100	1720	600	825	100	755	345	416	982	OD4-BBTN4
SG2/6630/05	5	1330	1720	600	975	160	905	425	526	1228	OD4-BBTN5
SG2/6630/06	6	1475	1720	600	1120	160	1050	425	612	1468	OD4-BBTN6
SG2/6630/07	7	1635	1720	600	1280	160	1210	425	722	1720	OD4-BBTN7

Options :

RH602..... Polyethylene extension to screw on, height 250 mm
 ANG2-3..... Level alarm for grease traps
 ANG2-3-N..... Simplified level alarm for grease traps (1 probe possible)
 SNB/SG..... Sludge probe